

Hand Sensor IR003(External)

Functions:


- Automatically switch ON/OFF when the hand pass over.
- Input Voltage: 12V-24VDC.
- Output Voltage: 12V-24VDC.
- Input Current: 4A.
- 0.5cm≤Detection Range≤10cm.
- Load around 48W for 12V, and 96W for 24V.
- Input and output cable length: DC wire 15cm (customized length can be ordered).
- Dimension: L45*W31*H9 mm.



Operations:

- The LED lamp connects to the output end.
- The IR sensor switch will turn on the LED light when the hand pass over and will turn off the LED light when the hand pass again.
- Detection range is 10cm from the sensor detector to the hand.
- The sensor switch will turn on or off the LED light with above repeatable steps.

Installation Steps:

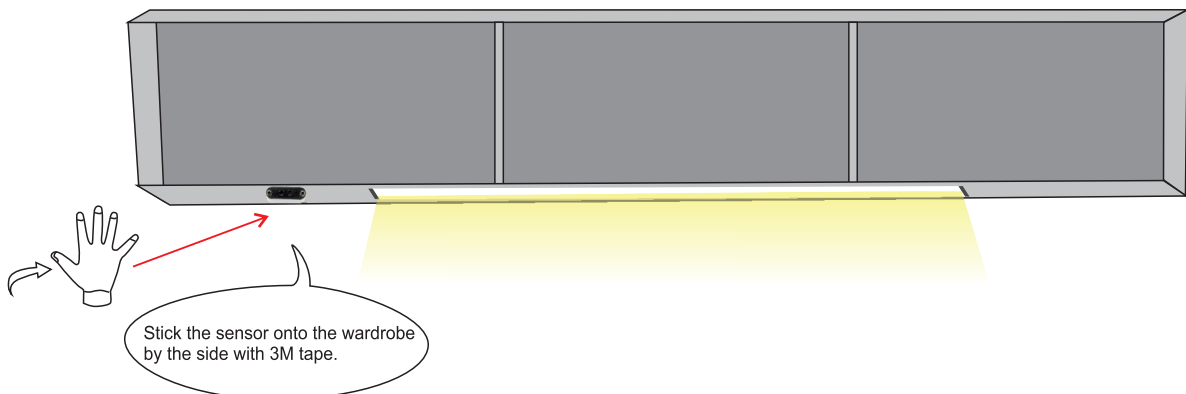

Note: Please read the tag on the wire when connecting cables.