



LED Closet Light CA01-WIFI

Characteristic

- Based on Android and IOS system, local and remote control are available. It supports scene effects editing by mobile phone itself.
- It supports automatic detection of new equipment. Network configuration can be done with one click.
- It supports the combination of one-click execution and automatic smart scenes, and the link of scenes and devices, enabling interaction among products.
- It supports Amazon Echo, Google Home and other third-party voice control, which are totally hand-free.
- Considerate permission management and device sharing can be used with no worry.
- Seamless connection with local life, allowing users to easily control smart devices, know the real-time device status and enjoy smart life.

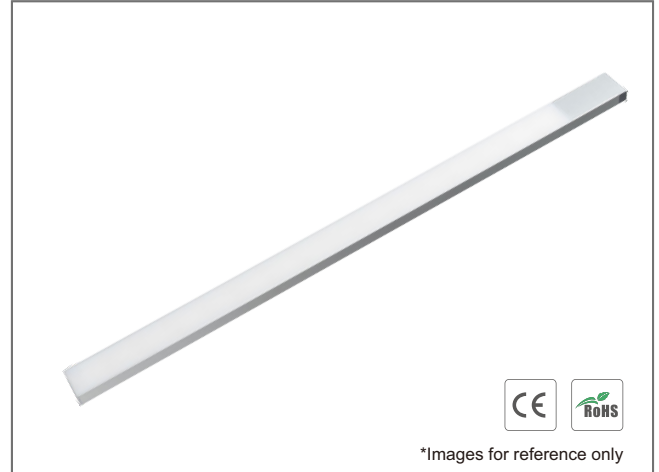

Size (mm)

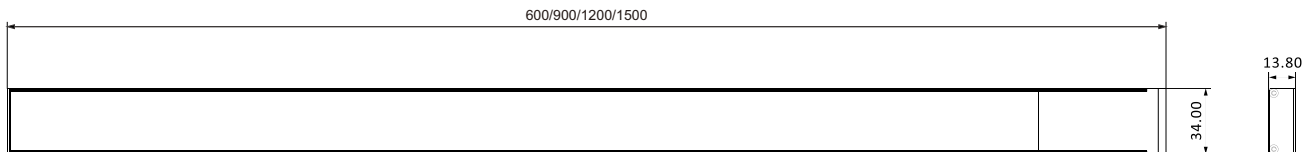

Technical Parameter

Hardware Parameters				
Input Voltage	DC12-24V			
Brightness Range	10%-100%			
Dimming Frequency	1,000Hz			
0V Memory	Yes, it takes effect after maintaining the current state for 5 seconds			
Length=600 mm	Power	8W		
	Color	WW	NW	CW
	Lumen/m	640	680	710
Length=900 mm	Power	12.5W		
	Color	WW	NW	CW
	Lumen/m	1,000	1,060	1,100
Length=1,200 mm	Power	17W		
	Color	WW	NW	CW
	Lumen/m	1,360	1,440	1,500
Length=1,500 mm	Power	21.5W		
	Color	WW	NW	CW
	Lumen/m	1,720	1,830	1,900

Network Configuration Parameters	
Trigger Mode of the First Network Distribution	Flashes after manually switching
Network Distribution Reset	Switch 3 times (ON-OFF-ON -OFF-ON)
Brightness of Reminder	50%
Successful Network Distribution	Light of reminder is ON with 100% brightness all the time

Network Guidance

Please scan below left QR code to download the Tuya Smart APP or Smart Life App on your mobile phone. And then use Tuya Smart or Smart Life app to scan the below right QR code of the distribution network, and then complete the operation according to the prompt steps



Tuya Smart APP



Smart Life APP



QR code of distribution network, please scan code with Tuya Smart app or Smart Life app.

Easy to Install

