

Add: 2/F, Building D, Yonghengxin Industrial Park, No. 5, Furui Road, Fuyong Town, Shenzhen, Guangdong, China.

t Tel: +86-0755-2792 6119 / 2792 6326


Email: sales@surmountor.com

SMD LED Strip Introduction SUR-2835FW60D-220V AC

Functions:

- Available in 220V~240V AC.
- CRI80 LED Strip are available.
- · Very bright & low power consumption.
- Operating temperature: -20~50°C.
- Long life span LED lights, more than 50,000 hours+.
- · Adhesive back, peel & stick!
- · Waterproof, IP67.

IP67 Silicone Extrusion Moding:



Applications:

- · Cove lighting;
- Architectural lights for canopy, corridor, window, archway;
- Backlight or edge lighting for signage;
- · DIY lights for home use;
- · Path and contour marking;
- Decorative lights for holiday, event, show, exhibition.

Photos:



Lister: 横着





REV:A0

Assessor:




Approver: 万寿


< 1/1 > REV:A0

(Tel: +86-0755-2792 6119 / 2792 6326

2835 SMD series: 60LED/METER

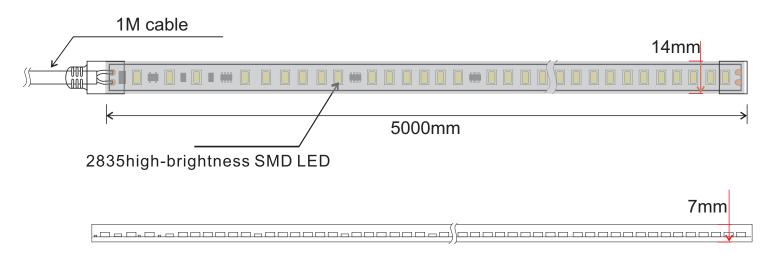

SMD2835, 60LED/1M							
Part Number	Size	Color	Cut Every (LEDS)	Lumen/m	Voltage	Power/m	Packing/m
SUR-2835FW60D-220V	L5000*W14*H7	WW _	60	667	AC 220V~240V	10W	5Meters/Reel
		NW 🗆		733			
		CW		800			

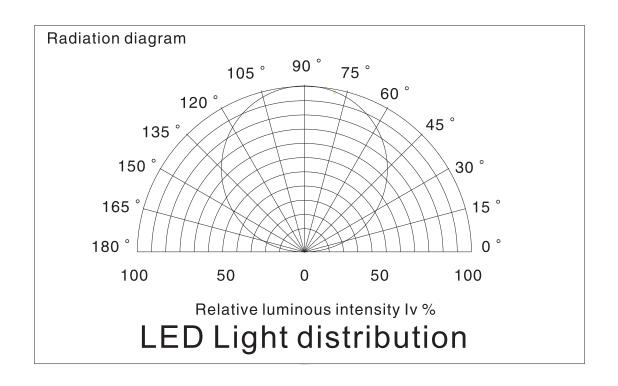

REV:A0

Lister: 概義

Assessor:



Approver: 分表


< 1/1 > REV:A0



Surmountor Lighting Co., Ltd

- Add: 2/F, Building D, Yonghengxin Industrial Park, No. 5, Furui Road, Fuyong Town, Shenzhen, Guangdong, China.
- **t** Tel: +86-0755-2792 6119 / 2792 6326

Color Spectrum (CRI80)

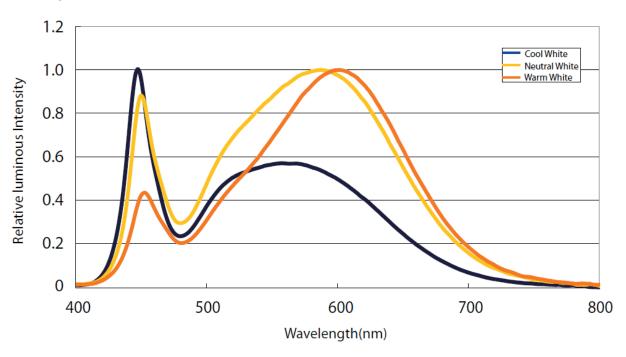

Package:









25 bags/Iner Box Inner box size:25x26x31cm



50 Bags/Outer Box
Outer box
size:34x52x27cm

REV:A0

Lister: 程為

Assessor:



Approver: 分表

< 1/1 > REV:A0




Tel: +86-0755-2792 6119 / 2792 6326

Email: sales@surmountor.com

How to connect flexible strip:

Below shows you how to connect the flexible strip to power supplies




Note: This AC led strip is drived by high voltage 220V-240VAC, and the output is 220V-240VDC, therefore when operating AC led strip should be very cautious in case of electric shock(insulation gloves should be weared during installation).




Cautions:

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:

Distortion(Wrong)

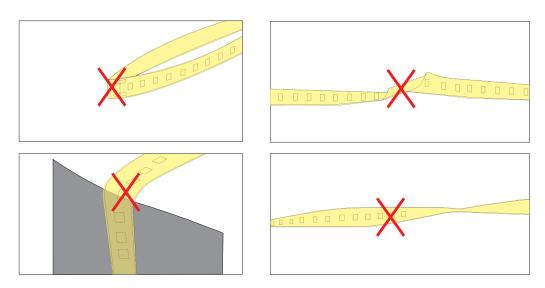

Bend (Right)



REV:A0

Lister: 程急 Assessor:



Approver: 分表

< 1/1 > REV:A0