



# *SurMountor*



**SUR-2110FW240-24V**

FLEXIBLE STRIP introduction

Product specification


Lister: Lxlan

Assessor: 

Approver: 

## Features:

- Available in 24V DC maximum.
- Very bright & low power consumption.
- Operating temperature: -20~50°C.
- Long life span LED lights, more than 50,000 hours+.
- Adhesive back, peel & stick!
- Dimmable by controller or sensor switch.
- Waterproof, IP20




## Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment.

## Assembly drawing

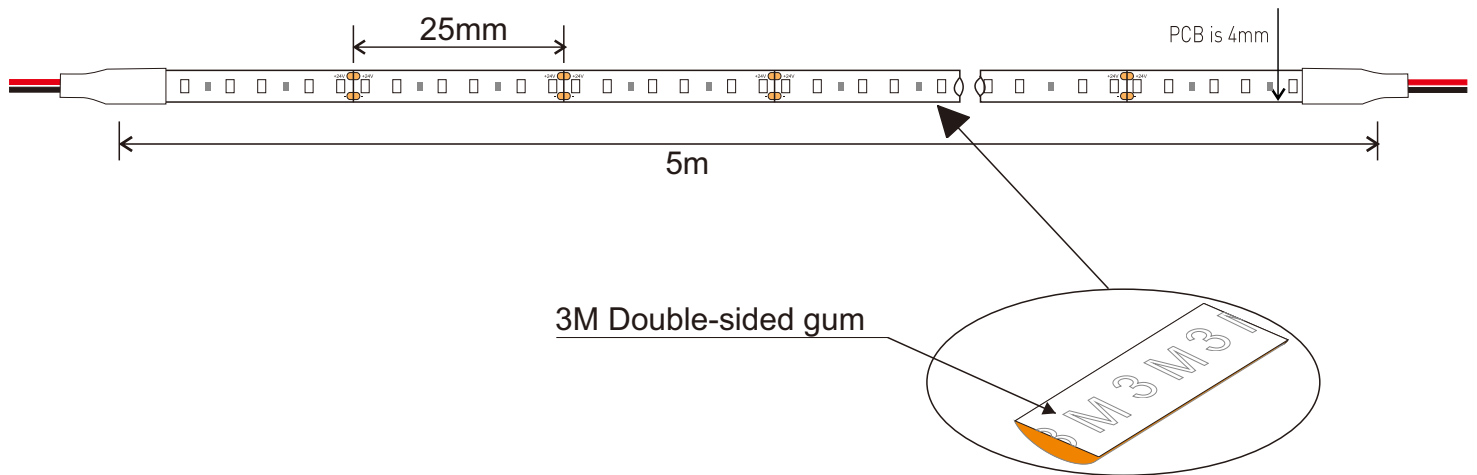


### Top View




### Section



## Parameter:

SMD 2110, 240LED/Meter								
Model No.	Size(mm)	Color	Cut Every (LEDS)	LEDS/M	Lumen/M	Voltage	Power/M	Package
SUR-2110FWW240-24V	L5000*W4*H3	WW 	6	240	439	24V	6W	5Meters/Reel
SUR-2110FNW240-24V		NW 			459			
SUR-2110FCW240-24V		CW 			473			


### Radiation diagram

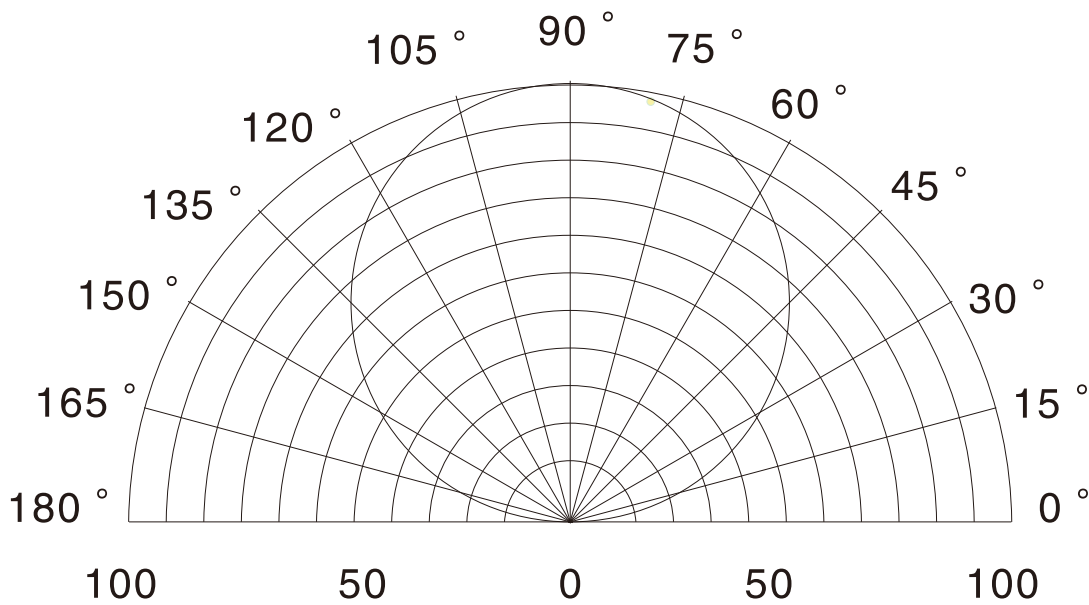

Relative luminous intensity Iv %


## LED Light distribution



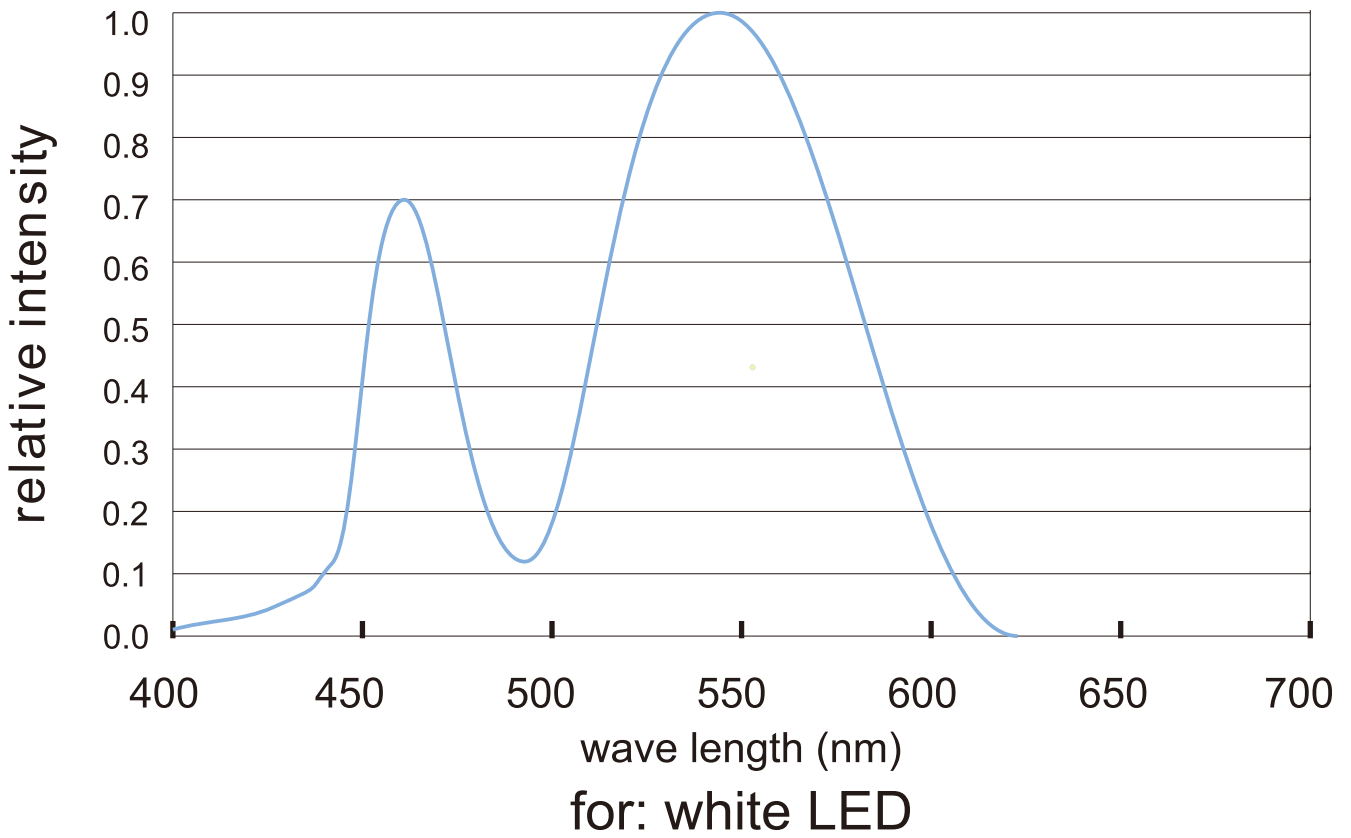

## How to connect flexible strip

Below shows you how to connect the flexible strip to power supplies.

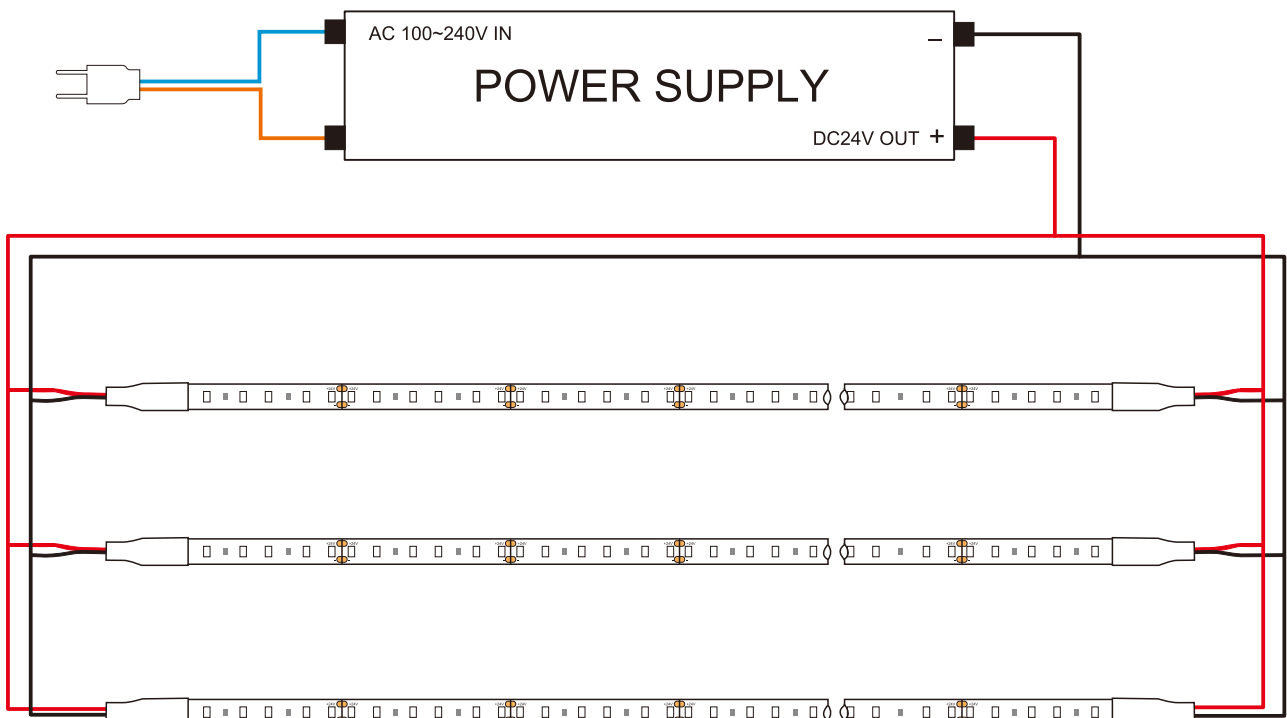

## Package:



1 reel/bag



25 bags/Inner Box



Inner box  
size:25x26x31cm

50 Bags/Outer Box







Outer box  
size:34x52x27cm


Package: 5 meter strip in one reel, one reel in one anti-static bag, 25 bags put into one inner box, 2 inner box put into one carton.

**! Cautions:**

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below:

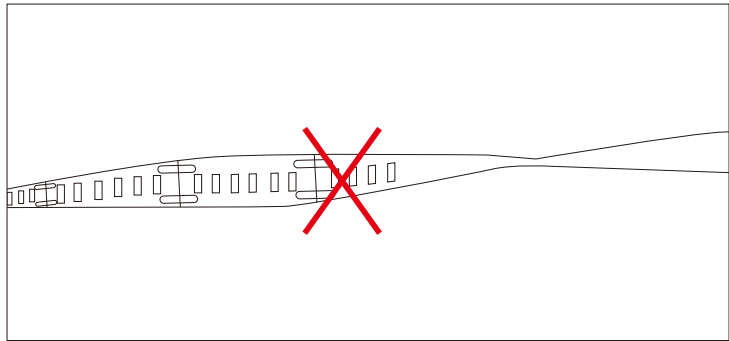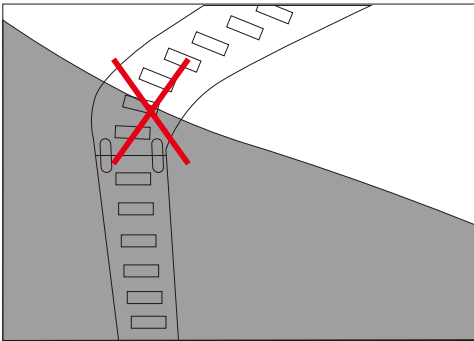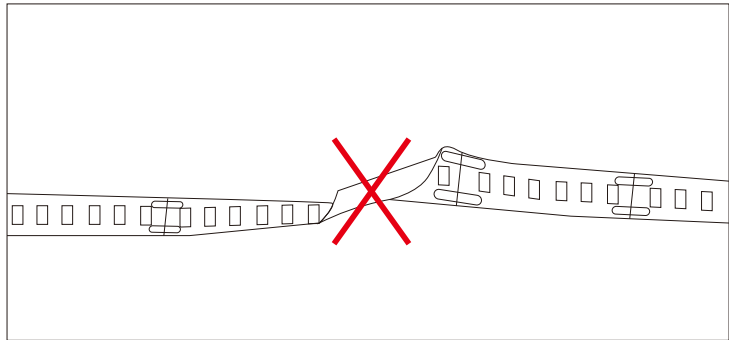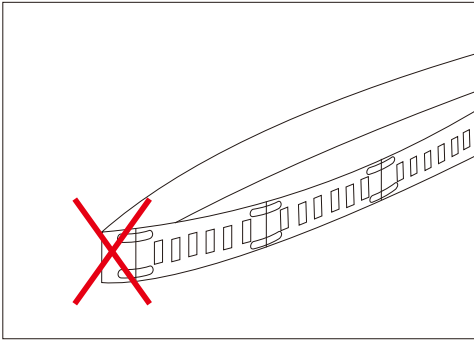

**Distortion(Wrong)**

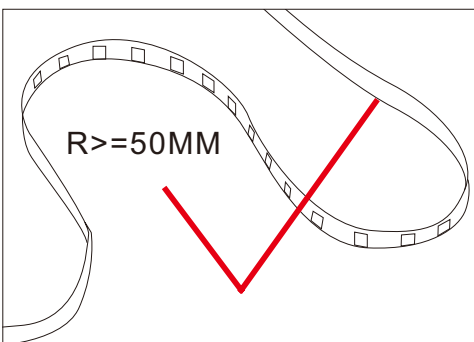

**Bend (Right)**