


Flex Led Neon Light

N1615D-TOP FC-N1615D-TOP



Product Specification

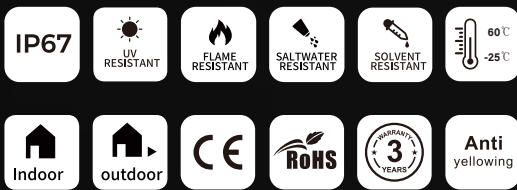


LED strip colloid specifications comparison

Materials	Silicone flexible led strip	PVC flexible led strip	Notes
Main parameters			
Colloid features in -40℃	No crack after 30 days	Totally cracked	The low temperature resistant of silicone is superior than PVC or epoxy materials
Colloid features in 120℃	No obvious change after 72 hours	Colloid changed into yellow and deformed after 2 hours	The high temperature resistant of silicone is superior than PVC or epoxy
Colloid features in 180℃	No obvious change after 72 hours	Colloid changed into brown and some melted after 20 minutes	Over 150℃ , PVC is easily hydrolyzed, Viscosity becomes weaken and easily seperated
Steadily lighted in Seawater for 72 hours	No obvious change	Serious atomization on the surface	The waterproof grade of silicone led strip can reach to IP67, high resistance to acidic alkali and salt properties
Thermal conductivity	Good thermal conductivity	No thermal conductivity	Pvc and epoxy cannot conduct heat, while silicone has good thermal conductivity

Product features


- Anti-yellowing and heat resisting silicone glue, chemical resistance acid and alkaline,available for extremely terrible outdoor environment.
- Uniform and soft luminance, no light spot.
- Super brightness large chip, golden wire welded and copper led holder for quicker heat dissipation, higher stability, longer life span.
- Leadless SMT technique (RoHS certificated), smooth welding joint, firm connection of led and pcb.

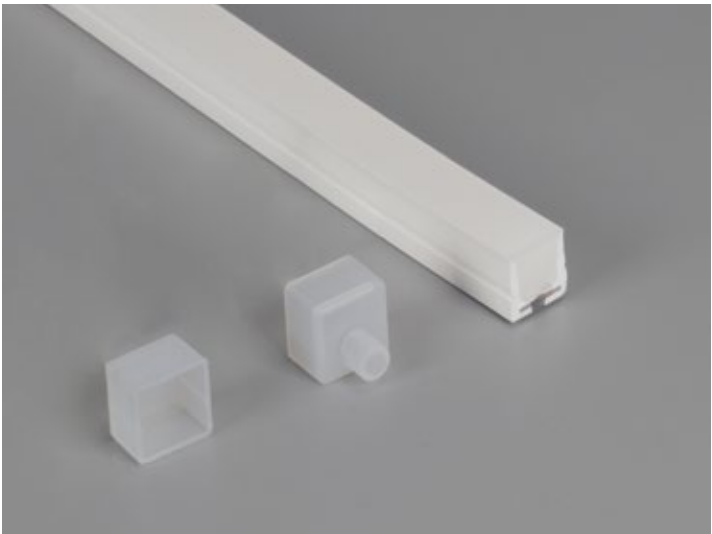

Specification



Bending (Silicone)

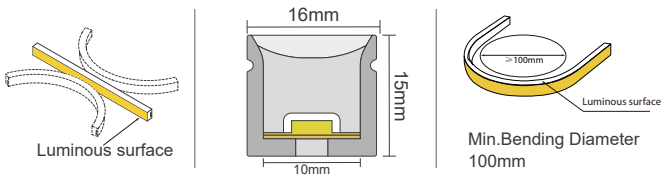

IP67 Protection

Flame Resistant

UV Resistant

Solvents Resistant

Saltwater Resistant

Dirt Resistant

CRI90


3 Years Warranty

Ambient Working
60 °C
-25 °C

Anti yellowing
Anti Yellowing

Model Number	N1615D-TOP	Size (mm)	16*15
PCB Limited (mm)	12mm	IP Grade	IP67
Working Temperature	-25 to 60°C	N.W.(G/M)	320g

Dimensions of light

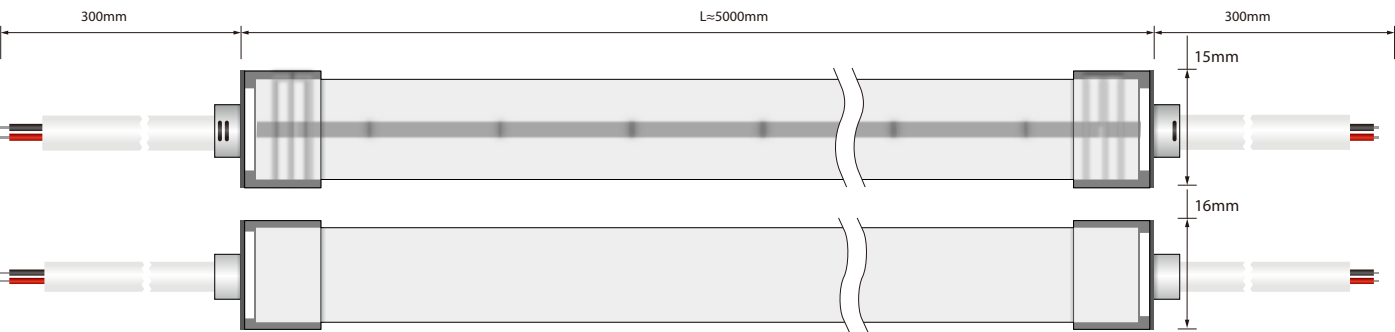

VARIOUS CONNECTIONS

Injection molded endcap.



front cable entry



side cable entry



bottom entry



closed

Silicone glue endcap



front cable entry



side cable entry



bottom entry



closed

Field install endcap



front cable entry



closed

N1220D-Accessories



LED profile:
1m/pc



Mounting clip
(Optional)



Curved profile
1m/pc



Glue



Closed silicone
endcap



Silicone endcap
-bottom



Silicone endcap
-side



Silicone endcap
-front

Cable

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
PVC Cable		0D: 4.0mm /Inner core: 20AW/G	●●	Red V+,Black V-
		0D: 4.5mm /Inner core: 20AW/G	●●○	Black V+,White W,Yellow WW
		0D: 4.5mm /Inner core: 20AW/G	●●●	Black V-,Red V+,Green DATA
		0D: 4.5mm /Inner core: 20AW/G	●●●●	Black V+,Blue B,Green G,Red R
		0D: 6.0mm /Inner core: 20AW/G	●○●●●	Black V+,White W,Blue B,Green G,Red R

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
Silicone Cable		0D: 6.0mm /Inner core: 18AW/G	●●	Red V+,Black V-
		0D: 6.0mm /Inner core: 20AW/G	●●○	Black V+,White W,Yellow WW
		0D: 6.0mm /Inner core: 20AW/G	●●●	Black V-,Red V+,Green DATA
		0D: 6.0mm /Inner core: 20AW/G	●●●●	Black V+,Blue B,Green G,Red R
		0D: 6.6mm /Inner core: 20AW/G	●○●●●	Black V+,White W,Blue B,Green G,Red R

Note: For more accessories, please contact our sales.

Driver & Cotronller



Order code: XLG-150-24-A
AC100-305V DC24V 150W
IP67, Global certification.
Non Dimmable.



Order code: ELG-150-24B
AC100-305V DC24V 150W
IP67, Global certification
3in1 dimming function: 0-10Vdc,
10V PWM signal and resistance.



Order code: ELG-150-24DA
AC100-305V DC24V 150W
IP67, Global certification
Dali control technology.



Order code: ELG-150-24DA
AC100-305V DC24V 150W
IP67, Global certification
Dali control technology.



SD Card programe controller.
SMD Capacity supports



For RGB IC- SP105E Magic
controller *For more info please



RGB+W controller: 4 Channel
DC12V/24V, 6A, RGB+W, RF
remote with finger touch ring.



RGB Controller: 3 Channel
DC12V/24V, 6A RGB controller,
RF remote with finger touch ring. .






Dimmer:1 Channel DC12V/24V,
6A, Dimmer, RF remote with
finger touch ring.






CCT Adjustable- 2 Channel
DC12V/24V,6A, CCT adjustable,
RF remote with finger touch ring.

Recommend LED strip parameters



(1) N1615D-TOP WHT

SMD2835, 120LED/meter									
Part number	Color	Lumen/M CRI 80	Lumen/M CRI 90	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-2835FW120-24V	WW 	901	811	50mm	6	120	24V	14.4W	5 meters from one end
	NW 	952	857						
	CW 	935	842						




(2) N1615D-TOP WHT

SMD2835, 160LED/meter									
Part number	Color	Lumen/M CRI 80	Lumen/M CRI 90	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-2835FW160-24V	3000K 	1294	1165	50mm	8	160	24V	14.4W	5 meters from one end
	4000K 	1344	1210						
	6000K 	1417	1275						







(3) N1615D-TOP TW

SMD3527, 120LED/meter, Dual color.										
Part number	Color	Lumen/M CRI 80	Lumen/M CRI 90	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length	
SUR-3527FW120-24V	WW 	395	356	50mm	6	120	24V	7.2W	5 meters from one end	
	CW 	404	364					14.4W		
	WW+CW									




(4) N1615D-TOP RGB

3838RGB LED Strip,120LED/Meter								
Part number	Color	Lumen/M	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-3838RGB-120-24V	Red 	76	50mm	6	120	24V	4.8W	5 meters from one end
	Green 	227						
	Blue 	48						
	RGB						14.4W	







(5) N1615D-TOP RGBW

5050RGBW, 96LED/Meter								
Part number	Color	Lumen/M	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-5050RGBW-96-24V	Red 	62	62.5mm	6	96	24V	3.75W	5 meters from one end
	Green 	173						
	Blue 	33						
	WW 	175						
	NW 	184						
	CW 	181						
	RGBW							
							15W	




(6) N1615D-TOP SPIRGB

5050RGBIC, 84LED/Meter								
Part number	Color	Lumen/M	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-5050RGBIC-84-24V	Red 	80	71.43mm	6	84	24V	5W	5 meters from one end
	Green 	238						
	Blue 	50						
	RGB						15W	


(7) N1615D-TOP RGBW-DMX512

4040RGBW, 96LED/Meter								
Part number	Color	Lumen/M	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-4040RGBW-96-24V	Red 	59	125mm	12	96	24V	4W	5 meters from one end
	Green 	177						
	Blue 	38						
	WW 	149						
	NW 	156						
	CW 	153						
	RGBW							


(8) FC-N1615D-TOP WHT

SMD2835, 180LED/meter									
Part number	Color	Lumen/M CRI 80	Lumen/M CRI 90	Unit cut	Cut every (LEDS)	LED Qty/M	Voltage	Power/M	Max run length
SUR-2835FW180-24V	WW 	960	864	cut anywhere	1	180	24V	14.4W	5 meters from one end
	NW 	1011	910						
	CW 	994	895						

Product system solutions

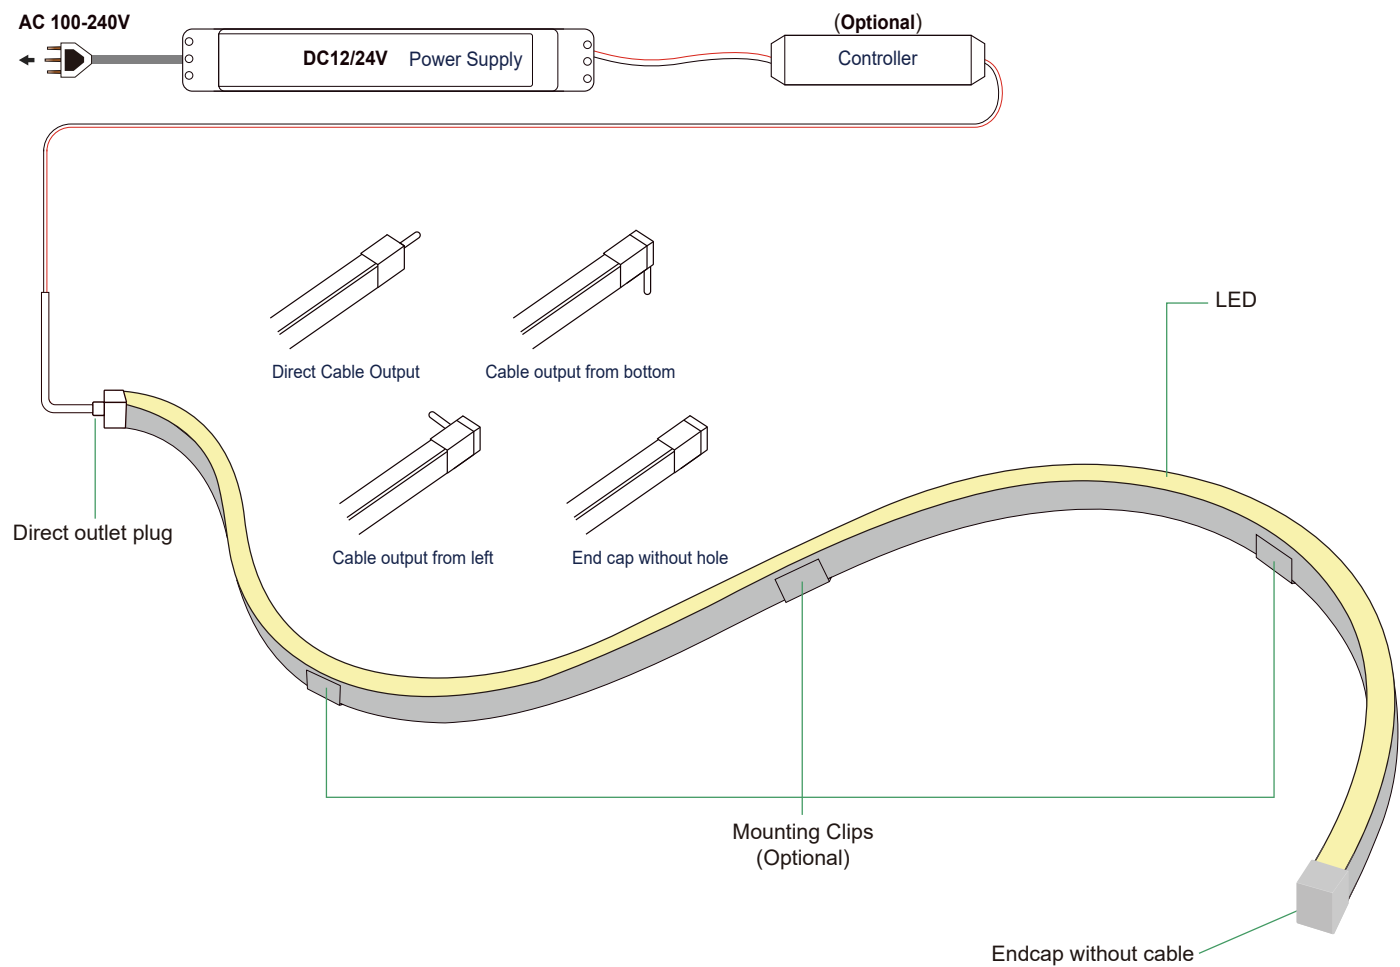


Cut mark

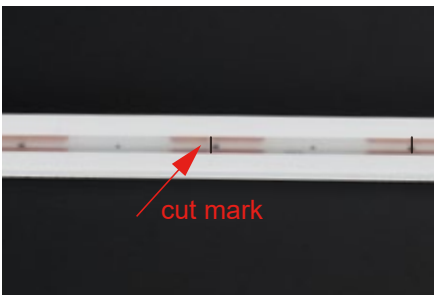

Remarks: There is a transparent window at the bottom of the light strip,




Make precise vertical cuts at the exact cut position of the light strip.

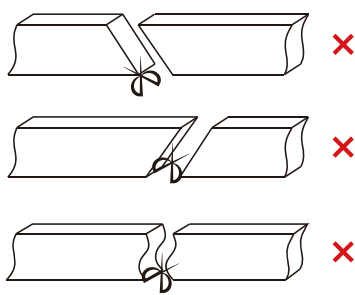

Please do not arbitrarily cut or cut into a bevel and arc section.



Installation

This product is suitable for surface mounting or embedded sealing installation. Recommended slot size: Width 16mm, Depth 15mm, gently press the neon sleeve into the slot.

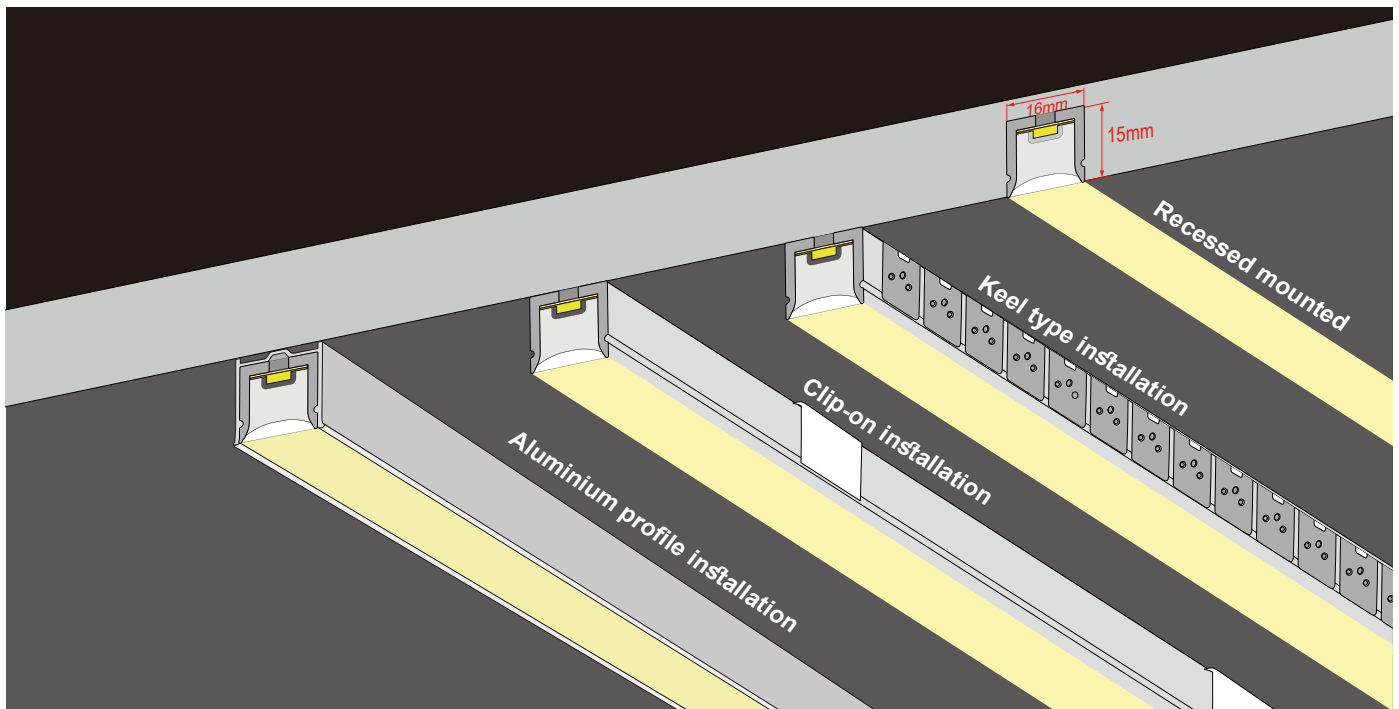


Installation of carrier



1. When installing the LED strip, install it from both ends at the same time, installation from one direction is prohibited.

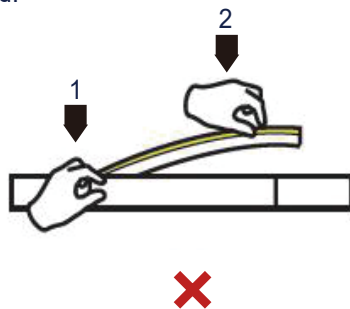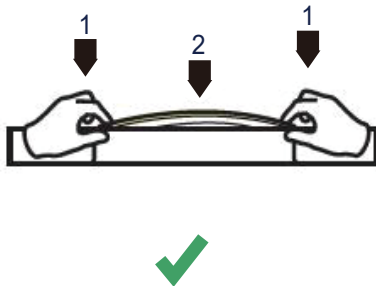


⚠ If the length of LED strip is over 2m, it is recommended to install by two persons.

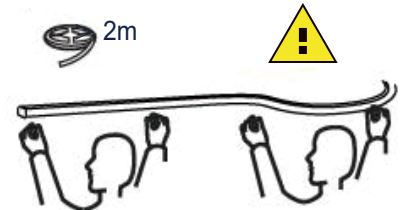

2. Use tool to disassemble carefully, and do not pull the LED strip directly.

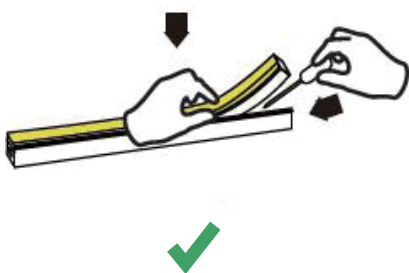


⚠ If the length of LED strip is over 2m, it is recommended to disassemble by two persons.

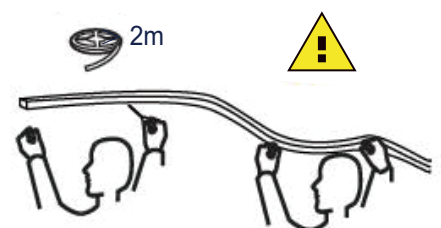



Cautions

- Please notice that the strips are not bendable to all directions. As the appropriate specific shape and degree, please follow the following instruction.
- LED strips are low voltage products, you must use the power supply (transformer). Please don't connect the led strip directly to the AC 110V or AC 220V. Otherwise, it will burn out the LED strips and lead to safety (security) accidents.
- Please read the specifications thoroughly before installation by professional staff to make sure the safe use.

Wrong bending way

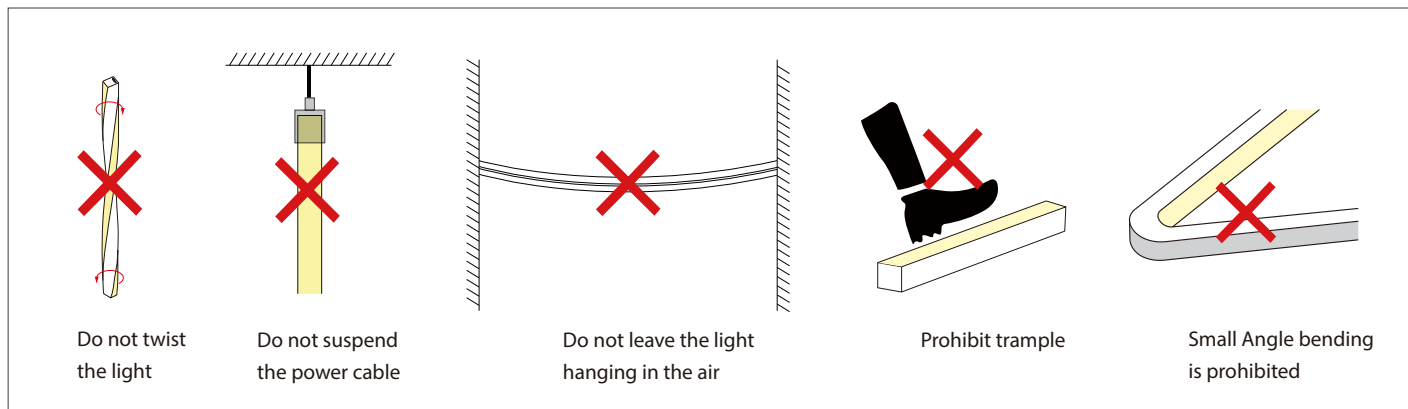

Correct bending way

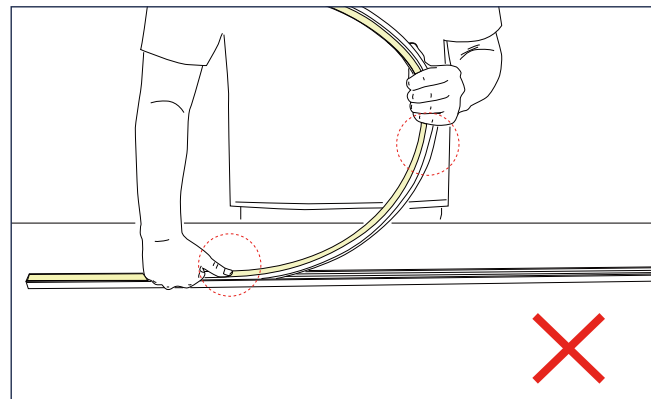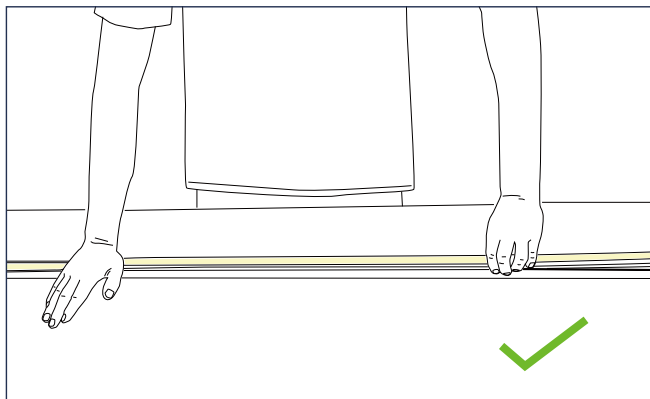

- Please press the led strip with your palm to slowly insert the led strip into the groove, and gently straighten the led strip above the groove with your right hand.
- Try to keep the led strip in a flat state during the installation process.

- Do not press the led strip with a single finger, it is easy to damage the internal parts of the led strip.
- The bent arc of the led strip should not be too large during installation.

Installation Precautions -- Side Mounted

(If the length of the light is more than 2 meters, two persons must work together to install it.)

Figure 1



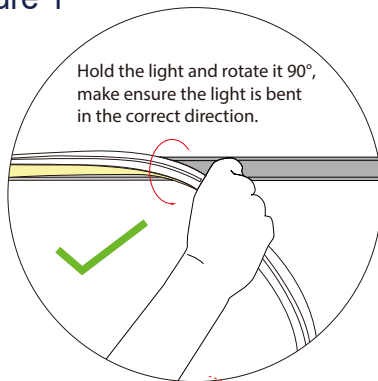


Figure 2

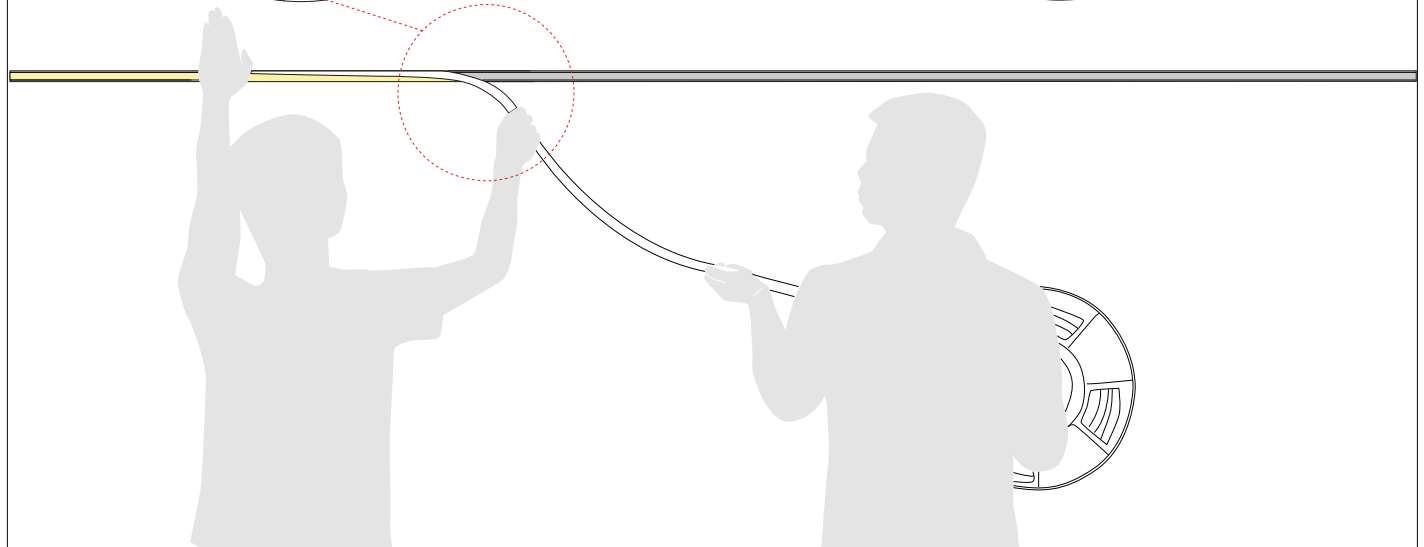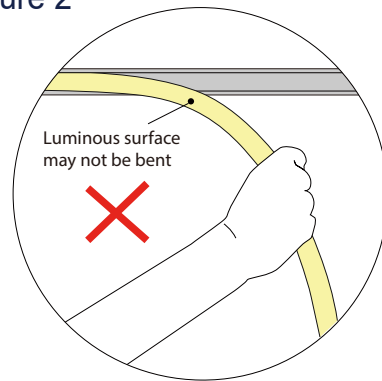

1. Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90° to droop it in the direction of your hand. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2. Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

Package of neon strip (5M/Roll)

