


# Surface Mounted Door Sensor IR006-D

## Functions:

- Lights will be ON/OFF when open/close the door.
- Input Voltage: 12V-24VDC.
- Output Voltage: 12V-24VDC.
- Input Current: 4A.
- Load around 48W for 12V, and 96W for 24V.
- Input and output cable length: 1m(Customized length can be ordered).
- $0.5\text{cm} \leq \text{Detection Range} \leq 10\text{cm}$ .

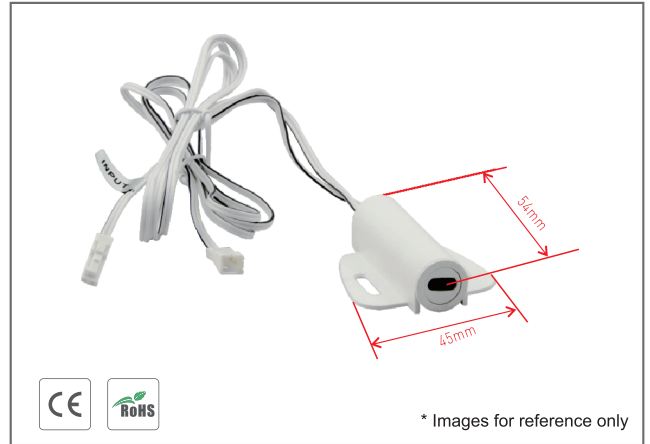


## Operations:

- The LED lamp connects to the output end.
- The IR sensor switch will turn on the LED light when the door is open and will turn off the LED light when the door is closed.
- Detection range is 10cm from the sensor detector to the door.
- The sensor switch will turn on or off the LED light with above repeatable steps.


## Installation Steps:

Step 1: Install the holder part with door sensor.

Step 2: Fix the holder part with 2 screws( M3x8) on the wooden plate, within 10cm from the detector head to the wardrobe door.



## Connectors:

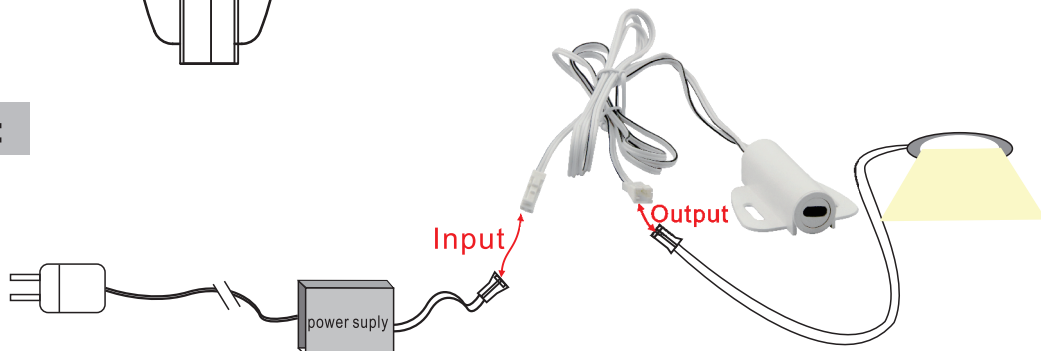

**Note:** Please read the tag on the wire when connecting cables.

The function/program can be customized, made upon different needs, such as longer time for stay on, etc.