

# LED Linear Track Light A3552


## Functions:

- Universal 3 Phase Philips Track Connector
- Professional optical design.
- The same product with multiple light distribution is available for different applications.
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver.
- Ultra anti-glare design UGR≤19
- LM80 certified Light source, life≥50000h.
- Built-in efficient and safe flicker-free philips power supply
- 10°/24°/36°/48°/10\*35° multiple optical design, more application.




## Applications:


**Diffuser**




**Anti-glare**



**Grating**



**Blind**



## Our three lengths standard models Specifications:

Model	Power	Color	Lumens	Ra	Size	Voltage
A3552-1200	38W	WW	1800lm	> 80	L1200*W35*H52	200-240VAC 50/60HZ
A3552-1200	38W	NW	1900lm	> 80	L1200*W35*H52	
A3552-1200	38W	CW	2000lm	> 80	L1200*W35*H52	

REV:A0

Lister:

Assessor:


Approver:

< 1/2 >  
REV:A0

**Installation:**

**1) With the track**

PHILIPS Xitanium LED driver

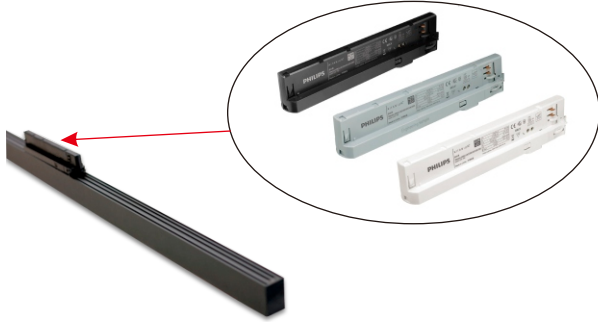

**2) Installation Steps:**

