- Add: 2/F, Building D, Yonghengxin Industrial Park, No. 5, Furui Road, Fuyong Town, Shenzhen, Guangdong, China.
- **t** Tel: +86-0755-2792 6119 / 2792 6326

# **Recessed LED Aluminum Profile W008**

#### **Features**

Internal Width: 36.9 mm

Material: Anodized Aluminum Extrusion

Length: 1~3 meter


Dimension: 88×18.6 mm

Application: Gypsum/Plaster Recessed Lighting

Customized color can be ordered



### **PRODUCT SIZE**




### **Standard Accessories**



LED Aluminum profile 1~3 Meter



PC COVER A: Transparent B: Frosted C: Mikly



Light Through The Lampshade A: Transparent B: Frosted C: Mikly



End Cap×2 1 with hold 1 without hold



Mounting Clip×2 Spring



Screw For End Cap x4 KM2X5 mm

REV:A0

Lister: 特為

Assessor:



Approver: 分表

< 2/1 >




# Surmountor Lighting Co., Ltd

- Add: 2/F, Building D, Yonghengxin Industrial Park, No. 5, Furui Road, Fuyong Town, Shenzhen, Guangdong, China.
- **t** Tel: +86-0755-2792 6119 / 2792 6326


### **Installation And Service Environment**

#### 1: Down lighting


#### With the mounting clip

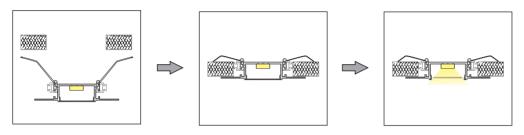

#### With the screw

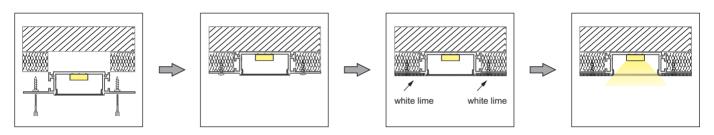

#### 2: Wall side lighting

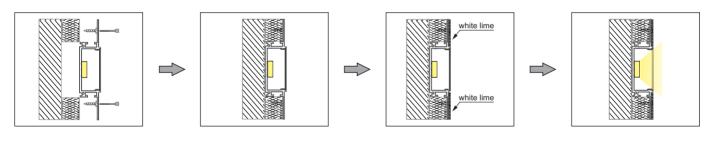

Step 1 Leavea 39. 9(W) \*16.8(H) mm groove when brush the cement

Step 2
Inset the W008 in the groove
and fixed the W008 led profile
wing on the dry cement surface.

Step 3
Paint the W007 wing with white lime.

Step 4
Turn on the light.

## PROJECT



REV:A0

Lister: 传奇

Assessor:



Approver: 分表