


## Soft Magnetic Track

### Features

- Surface mounting on iron materials only.
- Track: 10A max, DC12-36V .
- Connector: 3A max 20AWG 2468 Parallel Wire
- Color: Black, white, customized color are available.

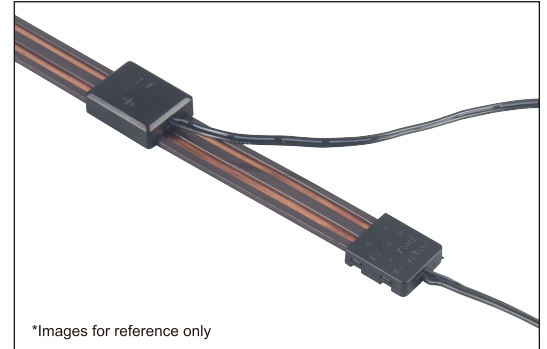

### Accessories:



**FTR01**

Track




**FTR02**

20AWG 2468 Parallel Wire  
Length and Color can be customized.



**FTR03**

16AWG 2468 Parallel Wire  
Length and Color can be customized.




**FTR04**


Color can be customized.

### Size:


**FTR01**




**FTR02**

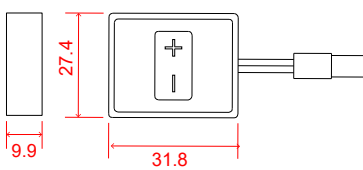


**FTR03**




**FTR04**




### Connection Diagram:




**Step 1**  
Connect the FTR03 and FTR04 to the FTR01



**Step 2**  
Installed FTR01 on iron materials

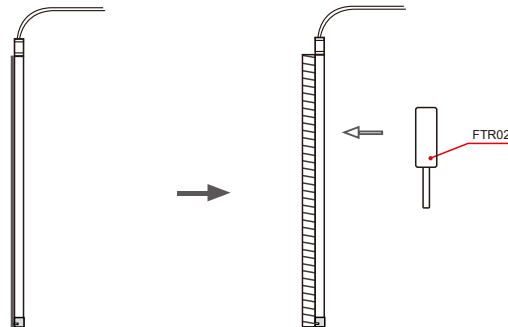

**Step 3**  
Install the FTR02 straight to the FTR01 and FTR02 can be used with iron material only.



**Step 4**  
Install successful