

Mi·Light®

RGB+CCT LED Strip Controller

Model No.: FUT039

Product Features



16 Millions of colors to choose



Color temperature 2700-6500K



Dimmable Saturation control



2.4GHz RF, remote control Control distance 30m



Smart phone App control Mi-Light WiFi ibox is needed

Technical Parameters

Model No.: FUT039

Output: Max. 6A/Channel

Total output: Max. 10A

Input voltage: DC12V-24V

Output connection: Common anode

Control distance: 30m

Mode list

M1. Fire mode.

M2. Several colors gradual changing.

M3. Different kelvin changing

M4. RGB with color temperature gradual changing.

M5. Seven colors flash.

M6. Random colors flash.


M7. Red gradual changing+ flash.

M8. Green gradual changing+flash.

M9. Blue gradual changing+flash.

Note: The colors can be dimming under any mode, the speed of any mode can be adjustable.


Connection diagram

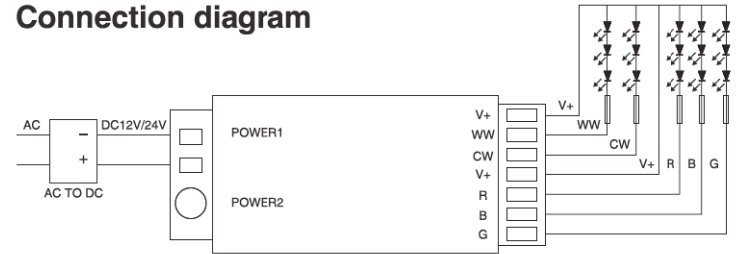

Attention:

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
2. Please don't connect wires with power on. Please switch on again only when it is in right connection and no short circuit.
3. Please do not use the controller in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.

Compatible Remote



B4 / T4



FUT092



NOTE:

Lighting can be working after linking with remote; for more details, pls read the remote instruction.



Made in China